



Circuit Breaker Lockout Reference Guide




Circuit Breaker Lockout Reference Guide

Brady offers a wide variety of lockouts to isolate and secure most circuit breaker switches. From standard snap- and clamp-on models to oversized, multi-pole and miniature options, Brady is sure to have what you need.

Use the guide below to find the correct lockout device for your circuit breakers. Find product information on BradyID.com.

Standard circuit breaker lockouts

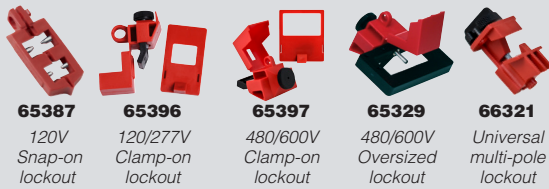

65387

120V
Snap-on
lockout

65396

120/277V
Clamp-on
lockout

65397

480/600V
Clamp-on
lockout

65329

480/600V
Oversized
lockout

66321

Universal
multi-pole
lockout

EZ Paneloc™ lockouts



51252

Snap-on
(SQD QO)
lockout

51254

Clamp-on
(universal)
lockout

Miniature circuit breaker lockouts



90844

Pin-out
standard
lockout

90847

Pin-in
standard
lockout

90850

Pin-out
wide
lockout

90853

Tie-bar
lockout

149433

Rotary
lockout

149514

Universal
lockout

Brand	Breaker Model	Poles	Compatible Lockout Device
ABB	E221	1	90844
ABB	E222	2	90844
ABB	E241	1	90844
ABB	E242	2	90844
ABB	E243	3	90844
ABB	E244	4	90844
ABB	E271	1	90844
ABB	E272	2	90844
ABB	E273	3	90844
ABB	E274	4	90844
ABB	F202AC	2	90850
ABB	F204AC	4	90850
ABB	F362	2	90844
ABB	F364	4	90844
ABB	F374	4	90844, 149514
ABB	F672	2	90850
ABB	F674	4	90850
ABB	JS	2-3	65397 w/cleat
ABB	MS325	3	149433, 149514
ABB	S1	3	65396
ABB	S201-B	1	90844
ABB	S201-C	1	90844
ABB	S201-D	1	90844
ABB	S201-K	1	90844
ABB	S201P-K	1	90844
ABB	S201P-Z	1	90844
ABB	S201U-K	1	90844
ABB	S201U-Z	1	90844
ABB	S201UP-K	1	90844
ABB	S201UP-Z	1	90844
ABB	S202-B	2	90844
ABB	S202-C	2	90844
ABB	S202-D	2	90844
ABB	S202-K	2	90844
ABB	S202P-K	2	90844
ABB	S202P-Z	2	90844
ABB	S202U-K	2	90844
ABB	S202U-Z	2	90844

Brand	Breaker Model	Poles	Compatible Lockout Device
ABB	S202UP-K	2	90844
ABB	S202UP-Z	2	90844
ABB	S203-B	3	90844
ABB	S203-C	3	90844
ABB	S203-D	3	90844
ABB	S203-K	3	90844
ABB	S203P-K	3	90844
ABB	S203P-Z	3	90844
ABB	S203U-K	3	90844
ABB	S203U-Z	3	90844
ABB	S203UP-K	3	90844
ABB	S203UP-Z	3	90844
ABB	S204-B	4	90844
ABB	S204-C	4	90844
ABB	S204-K	4	90844
ABB	S204U-K	4	90844
ABB	S204U-Z	4	90844
ABB	S204UP-K	4	90844
ABB	S204UP-Z	4	90844
ABB	S221	1	90844
ABB	S222	2	90844, 149514
ABB	S222-K	4	90844
ABB	S223	3	90844
ABB	S224	4	90844
ABB	S251	1	90844, 149514
ABB	S252	2	90844
ABB	S253	3	90844, 149514
ABB	S261	1	90844, 149514
ABB	S261-B	1	90844
ABB	S261-C	1	90844
ABB	S261-D	1	90844
ABB	S262-B	2	90844
ABB	S262-C	2	90844
ABB	S262-D	2	90844
ABB	S263	1	90844, 149514
ABB	S263-B	3	90844
ABB	S263-C	3	90844
ABB	S263-D	3	90844

Brand	Breaker Model	Poles	Compatible Lockout Device
ABB	S264-B	4	90844
ABB	S264-C	4	90844
ABB	S271-K	1	90844
ABB	S272	1	90844, 149514
ABB	S272-K	2	90844
ABB	S273-K	3	90844
ABB	S274-K	4	90844
ABB	S281-K	1	90844
ABB	S281-Z	1	90850
ABB	S281UC-K	1	90844
ABB	S281UC-Z	1	90850
ABB	S282-K	2	90844
ABB	S282-Z	2	90850
ABB	S282UC-K	2	90844
ABB	S282UC-Z	2	90850
ABB	S283-K	3	90844
ABB	S283-Z	3	90850
ABB	S283UC-K	3	90844
ABB	S283UC-Z	3	90850
ABB	S3	3	65397 w/cleat
ABB	S501-B	1	90850
ABB	S501-C	1	90850
ABB	S501-D	1	90850
ABB	S501-K	1	90850
ABB	S501UC-B	1	90850
ABB	S501UC-K	1	90850
ABB	S502-B	2	90850
ABB	S502-C	2	90850
ABB	S502-D	2	90850
ABB	S502-K	2	90850
ABB	S502UC-B	2	90850
ABB	S502UC-K	2	90850
ABB	S503-B	3	90850
ABB	S503-C	3	90850
ABB	S503-D	3	90850
ABB	S503-K	3	90850
ABB	S503UC-B	3	90850
ABB	S503UC-K	3	90850

Circuit Breaker Lockout Reference Guide (continued)

Brand	Breaker Model	Poles	Compatible Lockout Device
ABB	S504UC-B	4	90850
ABB	S504UC-K	4	90850
AEG	E82S	2	90847
Airpax	Airpax	1	65396 w/cleat
Allen Bradley	1492-CB1DF	1	90844
Allen Bradley	1492-CB1DG	1	90844
Allen Bradley	1492-CB1DH	1	90844
Allen Bradley	1492-CB1F	1	90844
Allen Bradley	1492-CB1G	1	90844
Allen Bradley	1492-CB1H	1	90844
Allen Bradley	1492-CB2DF	2	90844
Allen Bradley	1492-CB2DG	2	90844
Allen Bradley	1492-CB2DH	2	90844
Allen Bradley	1492-CB2F	2	90844
Allen Bradley	1492-CB2G	2	90844
Allen Bradley	1492-CB2H	2	90844
Allen Bradley	1492-CB3F	3	90844
Allen Bradley	1492-CB3G	3	90844
Allen Bradley	1492-CB3H	3	90844
Allen-Bradley	1492-CB1	1	90844
Allen-Bradley	1492-CB2	2	90844
Allen-Bradley	1492-CB3	3	90844
American Ckt. Bkr.	NEF	3	65396 w/cleat
American Ckt. Bkr.	NJJ	3	65397 w/cleat, 65329
American Switch	C	1	65396, 51252, 51254
Bryant	BR	2-3	66321, 51254
Bryant	BR	1	65387, 65396, 51254
Buschmat	S46	1	90844
Challenger	C	2-3	66321, 51254
Challenger	C	1	65387, 65396, 51254
Challenger	CDK	2-3	65397
Challenger	LM	1	65396
Challenger	NEJ	1-2	65396 w/cleat, 51254
Clipsal	4CB	1-3	90844
Clipsal	4CB116	1	90844
Clipsal	4CB320	3	90844
Crouse-Hinds	MP	2	66321, 51254
Cutler-Hammer	BA	1	65396, 51254
Cutler-Hammer	BAB	2-3	66321
Cutler-Hammer	BAB	1	65387, 65396, 51254
Cutler-Hammer	BD	1	65387, 65396, 51254
Cutler-Hammer	BR	2-3	66321, 51254
Cutler-Hammer	BR	1	65387, 65396, 51254
Cutler-Hammer	BRH	2-3	66321, 51254
Cutler-Hammer	BRH	1	65387, 65396, 51254
Cutler-Hammer	BRHH	2	66321, 51254
Cutler-Hammer	CC	3	65397 w/cleat
Cutler-Hammer	CH	2-3	65387, 65396, 51254, 51254
Cutler-Hammer	CH	1	65387, 65396, 51252, 51254
Cutler-Hammer	CH2	4	66321, 51254
Cutler-Hammer	CHB	2-3	66321, 51254
Cutler-Hammer	CHB	1	65387, 65396, 51252, 51254
Cutler-Hammer	CHH	3	65396 w/cleat
Cutler-Hammer	CHKD	2-3	65397
Cutler-Hammer	CHLD	2-4	65329
Cutler-Hammer	CHMDL	2-3	65329
Cutler-Hammer	CHND	2-4	65397 w/cleat
Cutler-Hammer	CHP	2-3	66321, 51254
Cutler-Hammer	CHP	1	65387, 65396, 51252, 51254
Cutler-Hammer	CHQ	1	65396, 51254
Cutler-Hammer	CHQ	2	66321, 51254
Cutler-Hammer	CHSW	2-3	66321, 51254
Cutler-Hammer	CKD	2-3	65397
Cutler-Hammer	CL	1	65387, 65396, 51252, 51254
Cutler-Hammer	CL	2	66321, 51254
Cutler-Hammer	CLD	2-4	65329
Cutler-Hammer	CLDC	2-4	65329
Cutler-Hammer	CMDL	2-3	65329
Cutler-Hammer	CND	2-4	65397 w/cleat
Cutler-Hammer	CNDC	2-4	65397 w/cleat
Cutler-Hammer	CSR	1	65396, 51254
Cutler-Hammer	DK	2-3	65397
Cutler-Hammer	E125B	1-4	65396, 51254
Cutler-Hammer	E125E	1-4	65396, 51254

Brand	Breaker Model	Poles	Compatible Lockout Device
Cutler-Hammer	E125H	1-4	65396, 51254
Cutler-Hammer	E125S	1-4	65396, 51254
Cutler-Hammer	ED	2-4	65396, 51254
Cutler-Hammer	EDC	2-4	65396, 51254
Cutler-Hammer	EDH	2-4	65396, 51254
Cutler-Hammer	EFH	1-4	65396, 51254
Cutler-Hammer	EGB	1-4	65396, 51254
Cutler-Hammer	EGE	1-4	65396, 51254
Cutler-Hammer	EGS	1-4	65396, 51254
Cutler-Hammer	EHC	1-4	65396, 51254
Cutler-Hammer	EHD	1-4	65396, 51254
Cutler-Hammer	FB	2-3	65396, 51254
Cutler-Hammer	FC	1-4	65396, 51254
Cutler-Hammer	FD	1-4	65396, 51254
Cutler-Hammer	FDB	2-4	65396, 51254
Cutler-Hammer	FDC	2-4	65396, 51254
Cutler-Hammer	FS	2-3	65396, 51254
Cutler-Hammer	GB	1-3	65396, 51254
Cutler-Hammer	GC	1-3	65396, 51254
Cutler-Hammer	GD	1-3	65396, 51254
Cutler-Hammer	GDB	1-3	65396, 51254
Cutler-Hammer	GHB	1-3	65396, 51254
Cutler-Hammer	GHBGFEP	1	65396, 51254
Cutler-Hammer	GHC	1-3	65396, 51254
Cutler-Hammer	GHCGFEP	1	65396, 51254
Cutler-Hammer	HBAW	2-3	66321
Cutler-Hammer	HBAW	1	65387, 65396, 51254
Cutler-Hammer	HBAX	2-3	66321
Cutler-Hammer	HBAX	1	65387, 65396, 51254
Cutler-Hammer	HFD	1-4	65396, 51254
Cutler-Hammer	HGH	1	65396, 51254
Cutler-Hammer	HGH	1	65396, 51254
Cutler-Hammer	HGD	2-4	65397
Cutler-Hammer	HKD	2-4	65397
Cutler-Hammer	HLD	2-4	65329
Cutler-Hammer	HMCP	2-3	65396, 65397, 65329
Cutler-Hammer	HMDL	2-3	65329
Cutler-Hammer	HMDLB	2-3	65329
Cutler-Hammer	HMPL	3	65397 w/cleat, 65329
Cutler-Hammer	HND	2-4	65397 w/cleat
Cutler-Hammer	HQP	2	66321
Cutler-Hammer	HQP	1	65387, 65396, 51254
Cutler-Hammer	JD	2-4	65397
Cutler-Hammer	JDB	2-3	65397
Cutler-Hammer	JDC	2-4	65397
Cutler-Hammer	KD	2-4	65397
Cutler-Hammer	KDB	2-4	65397
Cutler-Hammer	KDC	2-4	65397
Cutler-Hammer	LA	2-3	65397
Cutler-Hammer	LD	2-4	65329
Cutler-Hammer	LDB	2-3	65329
Cutler-Hammer	LDC	2-4	65329
Cutler-Hammer	LH	3	65397
Cutler-Hammer	LHB	3	65397
Cutler-Hammer	LJ	3	51254
Cutler-Hammer	MA	2-3	65397 w/cleat
Cutler-Hammer	MC	2-3	65397 w/cleat
Cutler-Hammer	MD	2-3	65329
Cutler-Hammer	MDL	2-3	65329
Cutler-Hammer	MDS	2-3	65329
Cutler-Hammer	NB	2-3	65329
Cutler-Hammer	ND	2-4	65397 w/cleat
Cutler-Hammer	NDC	2-4	65397 w/cleat
Cutler-Hammer	OPTIM	3	65397 w/cleat
Cutler-Hammer	PB	2-3	65329
Cutler-Hammer	QBGF	1	65396
Cutler-Hammer	QBGF	2	51254
Cutler-Hammer	QBGFEP	1	65396
Cutler-Hammer	QBGFEP	2	51254
Cutler-Hammer	QBHGF	1	65396
Cutler-Hammer	QBHGFEP	1	65396
Cutler-Hammer	QBHW	2-3	66321
Cutler-Hammer	QBHW	1	65387, 65396, 51254
Cutler-Hammer	QC	2-3	66321, 51254
Cutler-Hammer	QC	1	65387, 65396, 51254
Cutler-Hammer	QCD	2-3	66321, 51254
Cutler-Hammer	QCD	1	65387, 65396, 51254

Brand	Breaker Model	Poles	Compatible Lockout Device
Cutler-Hammer	QCGF	1	65396
Cutler-Hammer	QCGFEP	1	65396
Cutler-Hammer	QCHGF	1	65396
Cutler-Hammer	QCHGFEP	1	65396
Cutler-Hammer	QCHW	2-3	66321, 51254
Cutler-Hammer	QCHW	1	65387, 65396, 51254
Cutler-Hammer	QCHW	2-3	66321, 51254
Cutler-Hammer	QCHW	1	65387, 65396, 51254
Cutler-Hammer	QHCX	2-3	66321, 51254
Cutler-Hammer	QHCX	1	65387, 65396, 51254
Cutler-Hammer	QHPW	2-3	66321
Cutler-Hammer	QHPW	1	65387, 65396, 51254
Cutler-Hammer	QHPX	2-3	66321
Cutler-Hammer	QHPX	1	65387, 65396, 51254
Cutler-Hammer	QPGF	1	65396
Cutler-Hammer	QPGF	2	51254
Cutler-Hammer	QPGFEP	1	65396
Cutler-Hammer	QPGFEP	2	51254
Cutler-Hammer	QPHGF	1	65396
Cutler-Hammer	QPHGFEP	1	65396
Cutler-Hammer	QPHW	2-3	66321
Cutler-Hammer	QPHW	1	65387, 65396, 51254
Cutler-Hammer	WME	1-3	90844
Cutler-Hammer	WME	1-3	90844
Cutler-Hammer	WMF	1-3	90844
Cutler-Hammer	WMH	1-4	90844
Cutler-Hammer	WMM	1-4	90844
Cutler-Hammer	WMN	1-4	90844
Cutler-Hammer	WMS	1-4	90844
E-TA	911225	1	90847
E-TA	911220G	2	90844
FAZ	C16	1-4	90844
Fed. Pacific Elec.	2B	2	51254
Fed. Pacific Elec.	BAB	1	65396, 51254
Fed. Pacific Elec.	NA-single	3	65397 w/cleat, 51254
Fed. Pacific Elec.	NA-tie bar	2	51254
Fed. Pacific Elec.	NB	1	65397 w/cleat, 51254
Fed. Pacific Elec.	NBH GFI	1	65396, 51254
Fed. Pacific Elec.	NE/NEF	1-3	65396 w/cleat
Fed. Pacific Elec.	NEJ	1-3	65396 w/cleat
Fed. Pacific Elec.	NFJ	1-3	65396
Fed. Pacific Elec.	NJJ	1-3	65397
Fed. Pacific Elec.	NJL	1-3	65397
Fed. Pacific Elec.	NM	1-3	65397
Fed. Pacific Elec.	NP-single	1	65396, 51254
Frank Adams	P	1	65396, 51254
FUJI Electric	BU-ESA	3	65396 w/cleat
FUJI Electric	BU-ESB	3	65396 w/cleat
FUJI Electric	BU-FSB	3	65396 w/cleat
FUJI Electric	EA203B	3	65396 w/cleat
FUJI Electric	EA53B	3	65396 w/cleat
GE Vynckier	Series E	1-4	90847
GE Vynckier	Series G	1-3	90847
General Electric	EH400	3	65397
General Electric	HQC	3	65396, 51254
General Electric	SED	2-3	65396, 51254
General Electric	SEH	2-3	65396, 51254
General Electric	SEL	2-3	65396, 51254
General Electric	SEP	2-3	65396, 51254
General Electric	SFH	2-3	65396, 51254
General Electric	SFL	2-3	65396, 51254
General Electric	SFP	2-3	65396, 51254
General Electric	SGD	2-3	65396
General Electric	SGH	2-3	65396
General Electric	SGL	2-3	65396
General Electric	SGLA	2-3	65396
General Electric	SGP	2-3	65396
General Electric	SRPG	3	65396
General Electric	TB	2	65396 w/cleat, 51254
General Electric	TBC	2	65396 w/cleat, 51254
General Electric	TE	1-3	65396 w/cleat, 51254
General Electric	TEB	1-3	65396 w/cleat, 51254
General Electric	TED	1-3	65396 w/cleat, 51254
General Electric	TEF	1-3	65396 w/cleat, 51254
General Electric	TEL	3	65396 w/cleat, 51254
General Electric	TEML	3	65396 w/cleat, 51254
General Electric	TEY	1-3	65396, 51254
General Electric	TF	1-3	65396, 51254

Circuit Breaker Lockout Reference Guide (continued)

Brand	Breaker Model	Poles	Compatible Lockout Device
General Electric	TFC	3	65396 w/cleat, 51254
General Electric	TFJ	2-3	65397
General Electric	TFK	2-3	65397
General Electric	TFL	3	65397
General Electric	THED	1-3	65396 w/cleat, 51254
General Electric	THEF	1-3	65396 w/cleat, 51254
General Electric	THFK	2-3	65397
General Electric	THHQB	2-3	66321, 51254
General Electric	THHQB-A	1	65387, 65396, 51254
General Electric	THHQB-S	1	65396, 51254
General Electric	THHQC	1-3	66321, 51254
General Electric	THHQC-A	1	65387, 65396, 51254
General Electric	THHQC-S	1	65396, 51254
General Electric	THHQL	2-3	66321, 51254
General Electric	THHQL-A	1	65387, 65396, 51254
General Electric	THHQL-S	1	65396, 51254
General Electric	THJK4	2-3	65397 w/cleat
General Electric	THJK6	2-3	65397 w/cleat
General Electric	THKM12	2-3	65329
General Electric	THKM8	2-3	65329
General Electric	THLC1	3	65396 w/cleat
General Electric	THQB	2-3	66321, 51254
General Electric	THQB-A	1	65387, 65396, 51254
General Electric	THQB-S	1	65396, 51254
General Electric	THQC	2-3	66321, 51254
General Electric	THQC-A	1	65387, 65396, 51254
General Electric	THQC-AL	2-3	66321, 51254
General Electric	THQC-S	1	65396, 51254
General Electric	THQD	2-3	65396 w/cleat, 51254
General Electric	THQDBL	3	51254
General Electric	THQL	2-3	66321, 51254
General Electric	THQL-A	1	65387, 65396, 51254
General Electric	THQL-S	1	65396, 51254
General Electric	TJ2	2-3	65397 w/cleat, 65329
General Electric	TJ4	3	65397
General Electric	TJC	2-3	65396 w/cleat, 51254
General Electric	TJD	2-3	65397 w/cleat
General Electric	TJJ	2-3	65397 w/cleat
General Electric	TJK	2-3	65397 w/cleat
General Electric	TJS	2-3	65397 w/cleat
General Electric	TK4V	3	65397
General Electric	TKC	3	65396 w/cleat, 51254
General Electric	TKM	2-3	65329
General Electric	TKMA8	3	65329
General Electric	TQB	2-3	66321, 51254
General Electric	TQB-A	1	65387, 65396, 51254
General Electric	TQB-S	1	65396, 51254
General Electric	TQC	2-3	66321, 51254
General Electric	TQC-A	1	65387, 65396, 51254
General Electric	TQC-S	1	65396, 51254
General Electric	TQD	2-3	65396
General Electric	TQL-A	1	65387, 65396, 51254
General Electric	TQL-S	1	65396, 51254
General Electric	V	1-3	90847
General Electric	V	1-4	90847
Hager	453717	3	90844, 149514
Hager	MW216A	2	90844, 149514
Hager	MW620A	4	90844, 149514
Heinemann	LB	1	65396 w/cleat
Heinemann	LF	1	65396 w/cleat
Heinemann	LJ	1	65396 w/cleat
Kapp	LS68	1	90844
Legrand	1908	1	90844
Legrand	1935	3	90844
Legrand	1980	3-4	90844
Legrand	4302	2	90847
Legrand	6469	3	90847
Lemag	SD62	1	65396
Merlin Gerin	B100A	2	90850, 90853
Merlin Gerin	B100A	2	90850, 90853
Merlin Gerin	C125N1	3	65329
Merlin Gerin	C32N	1-3	90844
Merlin Gerin	C45AD	3	90844
Merlin Gerin	C60a	1-4	90844
Merlin Gerin	C60H	1-4	90844
Merlin Gerin	C60N	1-4	90844

Brand	Breaker Model	Poles	Compatible Lockout Device
Merlin Gerin	C801N	3	65329
Merlin Gerin	C80A	3	90850, 90853
Merlin Gerin	C80A	3	90850, 90853
Merlin Gerin	CE104N	3	65396 w/cleat
Merlin Gerin	CJ	3	65397 w/cleat
Merlin Gerin	CK1200NA	3	65329
Merlin Gerin	NC100H	1-3	90850
Merlin Gerin	NC100L	1-4	90850
Merlin Gerin	NC100L MA	3	90850
Merlin Gerin	NC100LH	1-4	90850
Merlin Gerin	NC100N	1-4	90850
Merlin Gerin	NC125H	1-3	90850
Proteus	C6	1	90844
Proteus	AC22BS5419	2	66321
Proteus	BSEN60947-3	2	66321
Proteus	C16	1	90844
Proteus	C6	1-3	90844
Siemens 17U	5SQ16	4	90853
Siemens C10	5SX1	1	90850, 149514
Siemens C32	5SX1-2	2	90853, 149514
Siemens ITE	5SN22	2	90853
Siemens ITE	5SQ11	1	90850, 149514
Siemens ITE	5SQ12	2	90853, 149514
Siemens ITE	5SQ13	3	90853, 149514
Siemens ITE	5SQ16	4	90853, 149514
Siemens ITE	5SX11	1	90850
Siemens ITE	5SX12	2	90853
Siemens ITE	5SX13	3	90853, 149514
Siemens ITE	5SX21	1	90850
Siemens ITE	BL	1	65387, 65396, 51252, 51254
Siemens ITE	BL	2-3	66321, 51254
Siemens ITE	BLF-GFI	2	66321, 51254
Siemens ITE	BLH	1	65387, 65396, 51254
Siemens ITE	BLH	2-3	66321, 51254
Siemens ITE	BQ	1	65387, 65396, 51254
Siemens ITE	BQ	2-3	66321, 51254
Siemens ITE	BQCH	1-3	65396, 51254
Siemens ITE	BQD	1-3	65396, 51254
Siemens ITE	BQH	1	65387, 65396, 51254
Siemens ITE	BQH	2-3	66321, 51254
Siemens ITE	CED6	2-3	65396, 51254
Siemens ITE	CFD6	2-3	65397 w/cleat
Siemens ITE	CFD6-ETI	2-3	65397 w/cleat
Siemens ITE	CJ3	3	65397
Siemens ITE	CJD6	2-3	65397
Siemens ITE	CJD6-ETI	2-3	65397
Siemens ITE	CLF	2	65397
Siemens ITE	CMD6	3	65329
Siemens ITE	CMD6-ETI	3	65329
Siemens ITE	CND6	3	65329
Siemens ITE	CPD6	3	65329
Siemens ITE	CQD	1-3	65396 w/cleat, 51254
Siemens ITE	E2	1-3	65396, 51254
Siemens ITE	E4	1-3	65396, 51254
Siemens ITE	ED	1-3	65396, 51254
Siemens ITE	ED4	1-3	65396, 51254
Siemens ITE	ED6	1-3	65396, 51254
Siemens ITE	ED6-ETI	3	65396, 51254
Siemens ITE	EE3	3	65396 w/cleat, 51254
Siemens ITE	EH3	3	65396 w/cleat, 51254
Siemens ITE	EQP	4	66321, 51254
Siemens ITE	ET	3	65396 w/cleat, 51254
Siemens ITE	FD6A	2-3	65397 w/cleat
Siemens ITE	FJ2-B	2-3	65396 w/cleat, 65397 w/cleat
Siemens ITE	FJ3	2	65397
Siemens ITE	FJ6	2	65397 w/cleat
Siemens ITE	FXD6-ETI	2-3	65397 w/cleat
Siemens ITE	FXD6A	2-3	65397 w/cleat
Siemens ITE	GF	1	65396, 51254
Siemens ITE	HBL	1	65387, 65396, 51254
Siemens ITE	HBL	2-3	66321, 51254
Siemens ITE	HBQ	1	65387, 65396, 51254
Siemens ITE	HBQ	2-3	66321, 51254
Siemens ITE	HE4	1-3	65396, 51254

Brand	Breaker Model	Poles	Compatible Lockout Device
Siemens ITE	HED4	1-3	65396, 51254
Siemens ITE	HED6	2-3	65396, 51254
Siemens ITE	HFD6	2-3	65397 w/cleat
Siemens ITE	HFXD6	2-3	65397 w/cleat
Siemens ITE	HHED6	2-3	65396, 51254
Siemens ITE	HHFD6	2-3	65397 w/cleat
Siemens ITE	HHJD6	2-3	65397
Siemens ITE	HHJXD6	2-3	65397
Siemens ITE	HJD6	2-3	65397
Siemens ITE	HJXD6	2-3	65397
Siemens ITE	HMD6	2-3	65329
Siemens ITE	HMXD6	2-3	65329
Siemens ITE	HN3	2	65329
Siemens ITE	HND6	2-3	65329
Siemens ITE	HNXD6	2-3	65329
Siemens ITE	HPD6	3	65329
Siemens ITE	HPXD6	3	65329
Siemens ITE	HQJ2-H	3	65396, 51254
Siemens ITE	HQP	1	65387, 65396, 51254
Siemens ITE	HQP	2-3	66321, 51254
Siemens ITE	HQPP	1	65387, 65396, 51254
Siemens ITE	HQPP	2-3	66321, 51254
Siemens ITE	HQPPH	2	66321, 51254
Siemens ITE	HRD6	3	65329
Siemens ITE	HRXD6	3	65329
Siemens ITE	JD2	3	65329
Siemens ITE	JD6-A	2-3	65397
Siemens ITE	JJ3	3	65397
Siemens ITE	JJ6	3	65329
Siemens ITE	JL3	3	65397
Siemens ITE	JXD2-A	2-3	65397
Siemens ITE	JXD6-A	2-3	65329
Siemens ITE	KM3	3	65329
Siemens ITE	LL3	3	65397
Siemens ITE	LL6	3	65329
Siemens ITE	LXD6-ETI	3	65329
Siemens ITE	MD6	2-3	65329
Siemens ITE	MXD6	2-3	65329
Siemens ITE	MXD6-ETI	2-3	65329
Siemens ITE	ND6	2-3	65329
Siemens ITE	NXD6	2-3	65329
Siemens ITE	PD6	3	65329
Siemens ITE	PXD6	3	65329
Siemens ITE	QJ2	2-3	65396 w/cleat, 51254
Siemens ITE	QJ2-H	2-3	65396 w/cleat, 51254
Siemens ITE	QJH2	2-3	65396 w/cleat, 51254
Siemens ITE	QP	1	65387, 65396, 51254
Siemens ITE	QP	2-3	66321, 51254
Siemens ITE	QP1	1	65396, 51254
Siemens ITE	QPH	1	65387, 65396, 51254
Siemens ITE	QPH	2-4	66321, 51254
Siemens ITE	QPP	1	65387, 65396, 51254
Siemens ITE	QPP	2-3	66321, 51254
Siemens ITE	QPPH	1	65387, 65396, 51254
Siemens ITE	QPPH	2-3	66321, 51254
Siemens ITE	RD6	3	65329
Siemens ITE	RXD6	3	65329
Siemens ITE	SCMD6	3	65329
Siemens ITE	SCND6	3	65329
Siemens ITE	SHLD6-A	3	65329
Siemens ITE	SHMD6	3	65329
Siemens ITE	SHND6	3	65329
Siemens ITE	SHPD6	3	65329
Siemens ITE	SMD6	3	65329
Siemens ITE	SND6	3	65329
Siemens ITE	SPD6	3	65329
Siemens ITE	VF3	3	65396
Siemens L20A	5SN2-2	2	90853, 149514
Square D	EDB	1-3	65396, 51254
Square D	EGB	1-3	65396, 51254
Square D	EH4	1-3	65396, 51254
Square D	EHB	1-3	65396, 51254
Square D	EHB	2-3	66321, 51254
Square D	EJB	1-3	65396, 51254
Square D	EZ	3	65329
Square D	FA	1-3	65396 w/cleat

Circuit Breaker Lockout Reference Guide (continued)

Brand	Breaker Model	Poles	Compatible Lockout Device
Square D	FAL	1-3	65396 w/cleat
Square D	FC	3	65396 w/cleat
Square D	FCL	2-3	65396 w/cleat
Square D	FDA	2-3	65396, 51254
Square D	FGA	3	51254
Square D	FH	1-3	65396 w/cleat
Square D	FHL	1-3	65396 w/cleat
Square D	FHL-DC	3	65396 w/cleat
Square D	FHP	3	65396 w/cleat
Square D	FI	3	65396 w/cleat
Square D	FIL	3	65396 w/cleat
Square D	FY	1	65396 w/cleat
Square D	GJL	3	65396 w/cleat
Square D	KA	2-3	65396 w/cleat
Square D	KAL	2-3	65396 w/cleat
Square D	KAP	2-3	65397
Square D	KC	2-3	65396 w/cleat
Square D	KCL	2-3	65396 w/cleat
Square D	KH	2-3	65396 w/cleat
Square D	KHL	3	65396 w/cleat
Square D	KI	2-3	65396 w/cleat
Square D	KIL	2-3	65396 w/cleat
Square D	L2	3	65329
Square D	LA	2-3	65397 w/cleat
Square D	LAL	2-3	65397 w/cleat, 65329
Square D	LAP	3	65397 w/cleat, 65329
Square D	LC	3	65329
Square D	LCP	3	65329
Square D	LH	2-3	65397 w/cleat
Square D	LHL	3	65397 w/cleat, 65329
Square D	LHP	1-2	65397 w/cleat, 65329
Square D	LXL	3	65329
Square D	MA	3	65329
Square D	MA	2-3	65397 w/cleat
Square D	MAL	3	65329
Square D	MH	2-3	65329
Square D	MH	2-3	65397 w/cleat
Square D	MHL	2-3	65329
Square D	ML-1	3	65397 w/cleat
Square D	ML-3	3	65329
Square D	MXL	3	65329
Square D	Q1B	2-3	65396, 51254
Square D	Q1L	2-3	65396, 51254
Square D	Q2	2-3	65396 w/cleat
Square D	Q2H	2-3	65396 w/cleat
Square D	Q2L	2-3	65396 w/cleat
Square D	Q2MT	2-3	65396 w/cleat
Square D	Q4	2-3	65397 w/cleat
Square D	Q4L	2-3	65397 w/cleat
Square D	QO	1	51252
Square D	QO	2-3	65387, 65396, 51252, 51254
Square D	QO-H	2	51252
Square D	QO-SWN	2-3	65387, 65396, 51252, 51254

Brand	Breaker Model	Poles	Compatible Lockout Device
Square D	QO-VH	1	51252
Square D	QO-VH	2-3	65387, 65396, 51252, 51254
Square D	QOB	1	51252
Square D	QOB	2-3	65387, 65396, 51252, 51254
Square D	QOB-H	2	51252
Square D	QOB-VH	2-3	66321
Square D	QOB-VH	1	65387, 65396, 51252, 51254
Square D	QOM1-VH	2	65396, 51254
Square D	QOM2-VH	2	65396, 51254
Square D	QOU	1	51252
Square D	QOU	2-3	65396, 51252, 51254
Square D	QOU w/tie bar	2-3	66321, 51254
Square D	QYU	1	51252
Square D	Y1	1	65397
Sursum	EA53	3	90847
Sylvania GTE	QC	2	66321, 51254
Sylvania GTE	Type C	2	66321, 51254
Thomas & Betts	F Frame	1-3	65396, 51254
Toshiba	E225B	3	65396 w/cleat
Westinghouse	BA	1-3	65387, 65396, 51254
Westinghouse	BA w/tie bar	2-3	66321
Westinghouse	BAB	1-3	65387, 65396, 51254
Westinghouse	BR	1-3	65387, 65396, 51254
Westinghouse	BR w/tie bar	2-3	66321, 51254
Westinghouse	BRH w/tie bar	2-3	66321
Westinghouse	CA	2	65396 w/cleat
Westinghouse	DA	2	65397
Westinghouse	DK	3	65397
Westinghouse	EB	1-3	65396 w/cleat, 51254
Westinghouse	ED	2-3	65396, 51254
Westinghouse	EH	1-3	65396, 51254
Westinghouse	EHB	1-3	65396 w/cleat
Westinghouse	EHD	1-3	65396, 51254
Westinghouse	FA	3	65396 w/cleat, 51254
Westinghouse	FB	2-3	65396 w/cleat, 51254
Westinghouse	FD	1-4	65396, 51254
Westinghouse	FDB	2-4	65396, 51254
Westinghouse	FDC	2-4	65396, 51254
Westinghouse	FP	3	65397 w/cleat
Westinghouse	GB	1-3	65396, 51254
Westinghouse	GBH	1-3	65396, 51254
Westinghouse	GH	1-3	65396, 51254
Westinghouse	GR	3	65397
Westinghouse	HBAW	1	65387, 65396, 51254
Westinghouse	HBAX	1	65387, 65396, 51254
Westinghouse	HCA	3	65396 w/cleat
Westinghouse	HFB	1-3	65396 w/cleat
Westinghouse	HFD	1-4	65396, 51254
Westinghouse	HKD	3	65397
Westinghouse	HLA	3	65397
Westinghouse	HLB	2-3	65397
Westinghouse	HMC	3	65397

Brand	Breaker Model	Poles	Compatible Lockout Device
Westinghouse	HMCP	3	65396 w/cleat, 51254
Westinghouse	HNC	3	65329
Westinghouse	HONP	3	65396, 51254
Westinghouse	HQP	1	65387, 65396, 51254
Westinghouse	JA	2-3	65397
Westinghouse	JB	3	65397
Westinghouse	JD	2-4	65397
Westinghouse	JDB	3	65397
Westinghouse	KA	3	65397 w/cleat
Westinghouse	KB	2-3	65397
Westinghouse	LA	3	65397 w/cleat
Westinghouse	LB	3	65397
Westinghouse	LBB	3	65397
Westinghouse	LH	3	65397
Westinghouse	MA	2-3	65397 w/cleat
Westinghouse	MC	2-3	65397 w/cleat
Westinghouse	MCC	2-3	65397 w/cleat
Westinghouse	MCP	3	65396 w/cleat, 51254
Westinghouse	NB	2-3	65329
Westinghouse	P	3	65396, 51254
Westinghouse	QBHW	1	65387, 65396, 51254
Westinghouse	QC	3	66321
Westinghouse	QC	1	65387, 65396, 51254
Westinghouse	QCHQ	1	65387, 65396, 51254
Westinghouse	QHCW	1	65387, 65396, 51254
Westinghouse	QHCX	1	65387, 65396, 51254
Westinghouse	QHPW	1	65387, 65396, 51254
Westinghouse	QPHW	1	65387, 65396, 51254
Westinghouse	Quicklag P	1-3	65396, 51254
Westinghouse	RE	1-2	65396, 51254
Westinghouse	RH	3	65397
Westinghouse	WPHX	1	65387, 65396, 51254
Wylex	WRS40/2	2	90844
Zinsco	HQB	3	65396, 51254
Zinsco	QB	1	65396, 51254

Twój dystrybutor marki Brady:

 **To learn more, contact your local Brady rep**



HTS-Polska Strzyga sp.j.
 Wola Pieczyska 27
 05-650 Chynów49
 NIP: 797 202 62

T: +48 22 619 07 70
M: +48 505 612 159
M: +48 501 753 716
e-mail: info@hts-polska.pl

